

ésobande type silo



Edition 2003 SI/SFB

FICHE TECHNIQUE

PRESENTATION

Bandes d'arrêt d'eau pour l'étanchéité des reprises de bétonnage des ouvrages enterrés ou en élévation.

Profils conçus pour ne pas se replier sous le béton.

EMPLOIS

Silos agricoles, réservoirs, fosses à lisier, ouvrages d'assainissement, etc

Remplacent avantageusement les feuillets en acier.

CONDITIONNEMENT

Réf. Silo, largeurs 60,80 et 120 mm

Rouleaux de 50 ml

CARACTERISTIQUES

- Matériau : PVC plastifié
 - Dureté shore A : 70 +/-3
 - Poids spécifique : 1.35
 - Allongement à la rupture : > 250 %
 - Contrainte à la rupture : > 12 MPa
- Bandes soudables à l'aide d'une lame chauffante

TECHNICAL DATA

PRESENTATION

Waterstop profiles for tightness of concrete construction joints, in underground or in elevation works.

Especially made to resist the poured concrete load.

USE

Agricol silos, tanks, cesspits, sewerage works, etc.

Replace easily steel strips.


PACKAGING

Réf. Silo, widths 60,80 et 120 mm

Rolls of 50 metres

CHARACTERISTICS

- Material : Soft PVC
 - Hardness shore A degree : 70 +/-3
 - Specific weight : 1.35
 - Extension at breaking point : > 250 %
 - Stress at breaking point : > 12 MPa
- These profiles are easily welded with a hot blade

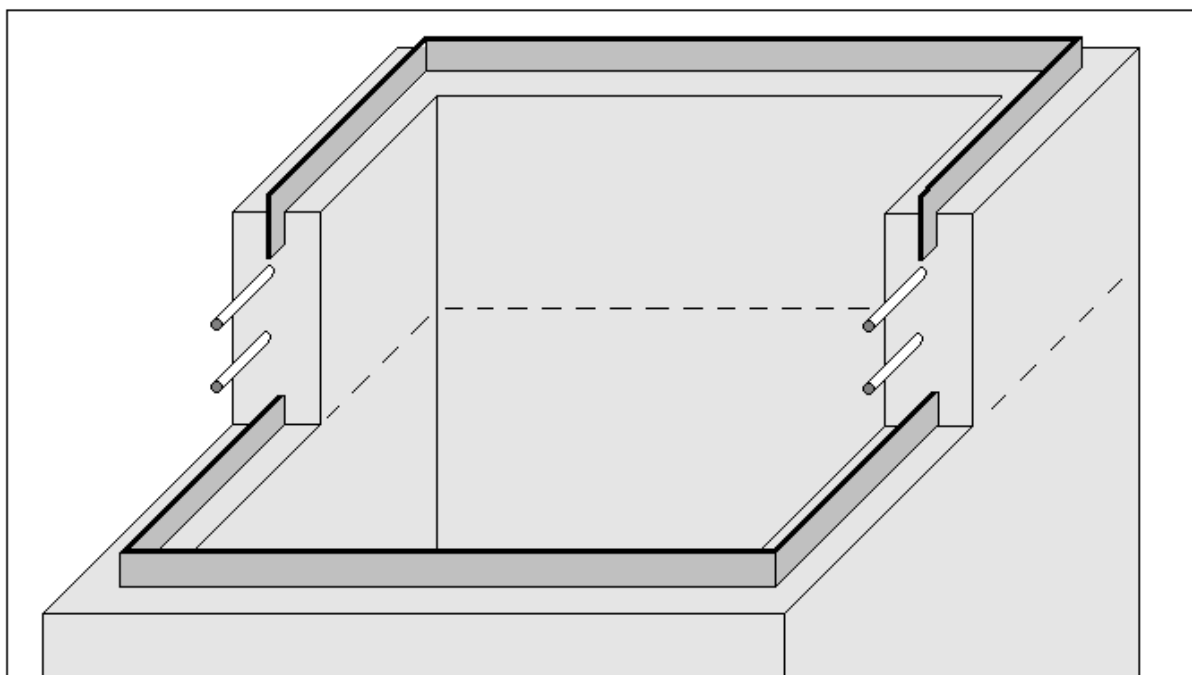



ésope continental

Site web: www.esope-continental.fr

Mail: info@esope-continental.fr

13 Avenue Gustave Rodet – 93250 Villemomble - France

Tél : (33) 01.48.94.91.91– Fax : (33) 01.48.94.81.50

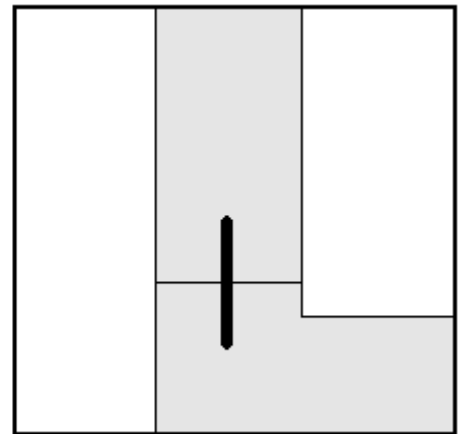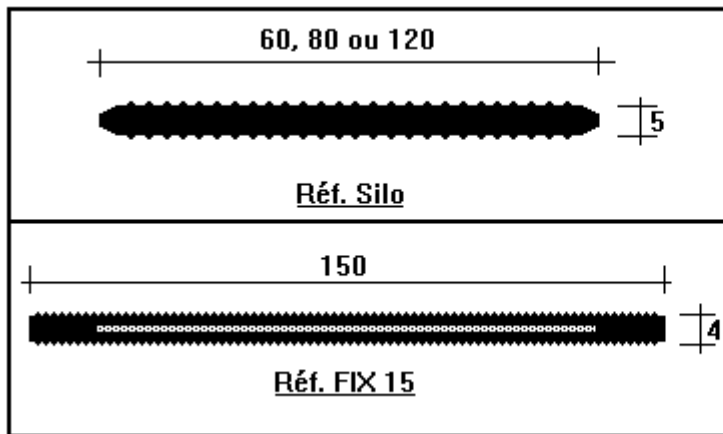

MISE EN OEUVRE

Par enfouissement dans le béton frais, entre les aciers d'armature

Les bandes sont soudables à l'aide d'une lame chauffante

Nota :

La largeur du profil ESOBANDE ne doit pas être supérieure à l'épaisseur de la paroi béton

PRODUITS COMPLEMENTAIRES

- **Esobande série PT** : Profils pour joints de dilatation
- **Idroband CR** : Bandes et mastics hydro-gonflants

INSTALLATION

Plunge the profile into the fresh concrete, between the steel reinforcement

These profiles are easily welded with a hot blade

Nota :

The width of ESOBANDE profiles must be less than the concrete thickness

COMPLEMENTARY PRODUCTS

- **Esobande série PT** : Profiles for expansion joints
- **Idroband CR** : Water-swelling strips and sealants